
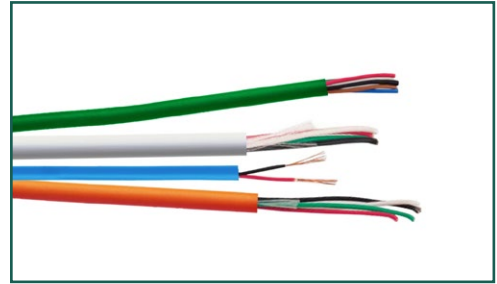


Access Control Cable

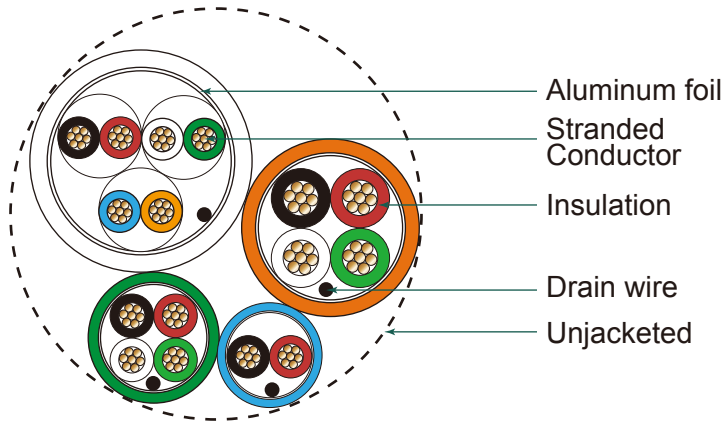

Available Put-Ups

- 500' Spool or Box
- 1000' Spool or Box

Available Colors



Description

Profusion access control cables are held together by a revolutionary tight, continuous twist scheme that secures lock power, card reader, door contact and request for exit (Rex/Spare) cables together without an adhesive material, delivering a better bundled cable, while saving the installer valuable time by eliminating the need to remove an outer jacket. This design eliminates cold weather cracking and cable separation problems.

Applications

- Gated communities
- Door strike / card reader / door contact
- CM Listed
- CMP Under Applying

CONSTRUCTION				
Group	Door Strike	Card Reader	Door Contact	Request For Exit
Conductor	18AWG BC 19/30 STR	22AWG BC 7/30 STR	22AWG BC 7/30 STR	22AWG BC 7/30 STR
Construction	4/C OAS	3pair OAS	2/C OAS	4/C OAS
Insulation Colors	BLK / RED, WHT / GRN	BLK / RED / GRN / WHT/ORG / BLU	BLK / RED	BLK / RED/ WHT / GRN
Lay Length	3" nom.	Pair-2" nom. Cable-4.5" nom.	1.75" nom.	1.75" nom.
Shield	AL/Mylar	AL/Mylar	AL/Mylar	AL/Mylar
Draine	Tinned Cooper 22AWG(7/30AWG)	Tinned Cooper 22AWG(7/30AWG)	Tinned Cooper 22AWG(7/30AWG)	Tinned Cooper 22AWG(7/30AWG)
Jacket	Low Smoke PVC	Low Smoke PVC	Low Smoke PVC	Low Smoke PVC
Jacket OD	0.178"	0.200"	0.12"	0.14"
Jacket Color	Orange	White	Blue	Green
SPECIFICATIONS				
Group	Door Strike	Card Reader	Door Contact	Request For Exit
Temp. Rating	60°C	60°C	60°C	60°C
Voltage Rating	300V	300V	300V	300V
DC Resistance	6.5Ω /M' @20°C	16.5Ω /M' @20°C	16.5Ω /M' @20°C	16.5Ω /M' @20°C
STANDARDS COMPLIANCE				
<ul style="list-style-type: none"> • RoHS Compliant • c(UL)us Listed • c(UL)us Listed Type CM/CMP 		<ul style="list-style-type: none"> • EU Directive 2002/95/EC(RoHS) • NEC/(UL) Specification CM/CMP 		