



Multi-Cond Security Cables Unshielded CL2 CM



Multi-conductors

AWG	#COND	Stranded/Solid
22	2/4/6/8/10	Stranded 7/30
18	2/4/6/8/10	Stranded 7/26
16	2/4	Stranded 7/24

Available Colors:

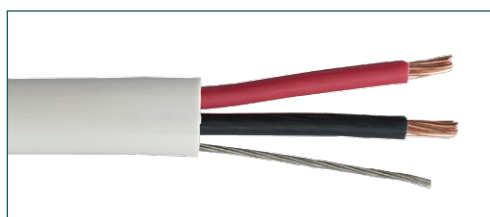

SPECIFICATIONS

Conductor	12-22AWG Stranded BC	Number of conductors	2-10
Insulation Material	PVC	Shield	N/A
Jacket Material	PVC	Nom.Capacitance 22AWG	14Pf/Ft
Jacket Type	CL2/CM	Nom.Capacitance 18AWG	17Pf/Ft
Temp Rating	75°C	Nom.Capacitance 16AWG	19Pf/Ft
Voltage Rating	300V		

STANDARDS COMPLIANCE

- RoHS Compliant
- UL listed CL2/CM
- UL 1424 Power Limited Fire Alarm Cable
- Type CL2 Class 2 Remote Control, Signaling & Power Limited Cables
- NEC Article 725
- Type FPL Power Limited Five Alarm Cable
- Type CM Communications Wire & Cable

AWG(Gauge)

22 thru 12 gauge is most common. Larger size for longer runs... Power loss should be calculated to determine the appropriate gauge size.

Number of Conductors

2 & 4 conductor are most popular. 6, 8, 10 or higher conductor count may be required for complex system or multiple zones.

NEC Article 725 Security Cable

Applies to the installation of wiring & equipment of the security systems including all circuits controlled and powered by the fire alarm system.

Description

The Win Long Security Cables are designed for a wide range of applications, including security systems, sound and intercom systems, power-limited controls, fire and burglar alarm systems, and more. Multi-conductor cables are perfect for power supplies, signaling circuits and many more devices. The cables are constructed with stranded copper conductors and insulated with PVC insulation.

Applications

- Fire alarm systems
- Signaling devices
- Annunciators
- Control circuits


Features & Benefits

- NEC Articles 725, 760 and 800
- UL Listed
- RoHS Compliant
- CL2/CM Rated

Available Put-Ups

- 500' Reel or Box
- 1000' Reel or Box


Multi-Cond Security Cables Unshielded CL2R CMR



Multi-conductors

AWG	#COND	Stranded/Solid
22	2/4/6/8/10	Stranded 7/30
18	2/4/6/8/10	Stranded 7/26
16	2/4	Stranded 7/24

Available Colors:

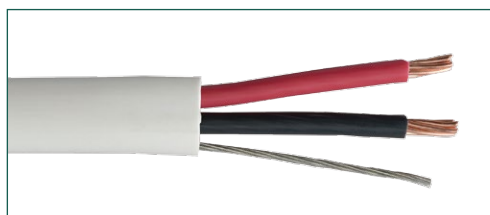

SPECIFICATIONS

Conductor	12-22AWG Stranded BC	Number of conductors	2-10
Insulation Material	PVC	Shield	N/A
Jacket Material	PVC	Nom.Capacitance 22AWG	14Pf/Ft
Jacket Type	CL2R/CMR	Nom.Capacitance 18AWG	17Pf/Ft
Temp Rating	75°C	Nom.Capacitance 16AWG	19Pf/Ft
Voltage Rating	300V		

STANDARDS COMPLIANCE

- RoHS Compliant
- UL listed CL2R/CMR
- UL 1424 Power Limited Fire Alarm Cable
- Type CL2 Class 2 Remote Control, Signaling & Power Limited Cables
- NEC Article 725
- Type FPL Power Limited Five Alarm Cable
- Type CM Communications Wire & Cable

AWG(Gauge)

22 thru 12 gauge is most common. Larger size for longer runs... Power loss should be calculated to determine the appropriate gauge size.

Number of Conductors

2 & 4 conductor are most popular. 6, 8, 10 or higher conductor count may be required for complex system or multiple zones.

NEC Article 725 Security Cable

Applies to the installation of wiring & equipment of the security systems including all circuits controlled and powered by the fire alarm system.

Description

The Win Long Security Cables are designed for a wide range of applications, including security systems, sound and intercom systems, power-limited controls, fire and burglar alarm systems, and more. Multi-conductor cables are perfect for power supplies, signaling circuits and many more devices. The cables are constructed with stranded copper conductors and insulated with PVC insulation.

Applications

- Fire alarm systems
- Signaling devices
- Annunciators
- Control circuits


Features & Benefits

- NEC Articles 725, 760 and 800
- UL Listed
- RoHS Compliant
- CL2R/CMR Rated

Available Put-Ups

- 500' Reel or Box
- 1000' Reel or Box


Multi-Cond Security Cables Shielded CL2 CM

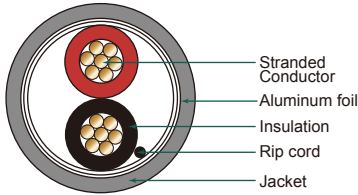

Multi-conductors

AWG	#COND	Stranded/Solid
22	2/4/6/8/10	Stranded 7/30
18	2/4/6/8/10	Stranded 7/26
16	2/4	Stranded 7/24

Available Colors:

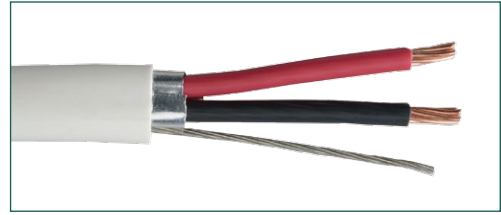

SPECIFICATIONS

Conductor	12-22AWG Stranded BC	Number of conductors	2-10
Insulation Material	PVC	Shield	Alumfoil
Jacket Material	PVC	Nom.Capacitance 22AWG	14Pf/Ft
Jacket Type	CL2/CM	Nom.Capacitance 18AWG	17Pf/Ft
Temp Rating	75°C	Nom.Capacitance 16AWG	19Pf/Ft
Voltage Rating	300V		

STANDARDS COMPLIANCE

- RoHS Compliant
- UL listed CL2/CM
- UL 1424 Power Limited Fire Alarm Cable
- Type CL2 Class 2 Remote Control, Signaling & Power Limited Cables
- NEC Article 725
- Type FPL Power Limited Five Alarm Cable
- Type CM Communications Wire & Cable

AWG(Gauge)

22 thru 12 gauge is most common. Larger size for longer runs... Power loss should be calculated to determine the appropriate gauge size.

Number of Conductors

2 & 4 conductor are most popular. 6, 8, 10 or higher conductor count may be required for complex system or multiple zones.

NEC Article 725 Security Cable

Applies to the installation of wiring & equipment of the security systems including all circuits controlled and powered by the fire alarm system.

Description

The Win Long Security Cables are designed for a wide range of applications, including security systems, sound and intercom systems, power-limited controls, fire and burglar alarm systems, and more. Multi-conductor cables are perfect for power supplies, signaling circuits and many more devices. The cables are constructed with stranded copper conductors and insulated with PVC insulation.

Applications

- Fire alarm systems
- Signaling devices
- Annunciators
- Control circuits


Features & Benefits

- NEC Articles 725, 760 and 800
- UL Listed
- RoHS Compliant
- CL2/CM Rated

Available Put-Ups

- 500' Reel or Box
- 1000' Reel or Box


Multi-Cond Security Cables Shielded CL2R CMR

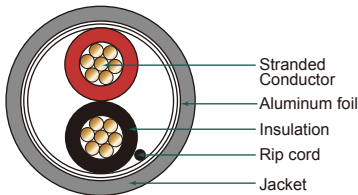

Multi-conductors

AWG	#COND	Stranded/Solid
22	2/4/6/8/10	Stranded 7/30
18	2/4/6/8/10	Stranded 7/26
16	2/4	Stranded 7/24

Available Colors:

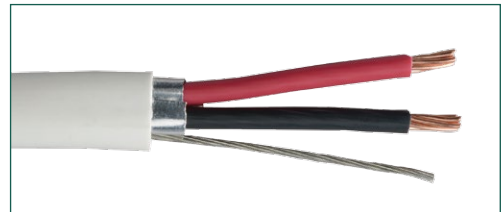

SPECIFICATIONS

Conductor	12-22AWG Stranded BC	Number of conductors	2-10
Insulation Material	PVC	Shield	Alumfoil
Jacket Material	PVC	Nom.Capacitance 22AWG	14Pf/Ft
Jacket Type	CL2R/CMR	Nom.Capacitance 18AWG	17Pf/Ft
Temp Rating	75°C	Nom.Capacitance 16AWG	19Pf/Ft
Voltage Rating	300V		

STANDARDS COMPLIANCE

- RoHS Compliant
- UL listed CL2R/CMR
- UL 1424 Power Limited Fire Alarm Cable
- Type CL2 Class 2 Remote Control, Signaling & Power Limited Cables
- NEC Article 725
- Type FPL Power Limited Five Alarm Cable
- Type CM Communications Wire & Cable

AWG(Gauge)

22 thru 12 gauge is most common. Larger size for longer runs... Power loss should be calculated to determine the appropriate gauge size.

Number of Conductors

2 & 4 conductor are most popular. 6, 8, 10 or higher conductor count may be required for complex system or multiple zones.

NEC Article 725 Security Cable

Applies to the installation of wiring & equipment of the security systems including all circuits controlled and powered by the fire alarm system.

Description

The Win Long Security Cables are designed for a wide range of applications, including security systems, sound and intercom systems, power-limited controls, fire and burglar alarm systems, and more. Multi-conductor cables are perfect for power supplies, signaling circuits and many more devices. The cables are constructed with stranded copper conductors and insulated with PVC insulation.

Applications

- Fire alarm systems
- Signaling devices
- Annunciators
- Control circuits

Features & Benefits

- NEC Articles 725, 760 and 800
- UL Listed
- RoHS Compliant
- CL2R/CMR Rated

Available Put-Ups

- 500' Reel or Box
- 1000' Reel or Box